

MATERIAL



Housing :Nylon with 30% glass fiber UL 94V-0
 Cover :Nylon with 30% glass fiber UL- 94V- 0
 Contact:Phosphor bronze C5191
 Handle:PPS R-4

FINISH

Plating code reference page1.

SPECIFICATION

Temperature range:-50°C~ +105°C
 Current rating:1 A
 Contact resistance:30mΩ Max.
 Insulation resistance:5000 MΩ Min.
 Withstanding voltage:500V AC
 Life cycle:50 cycles

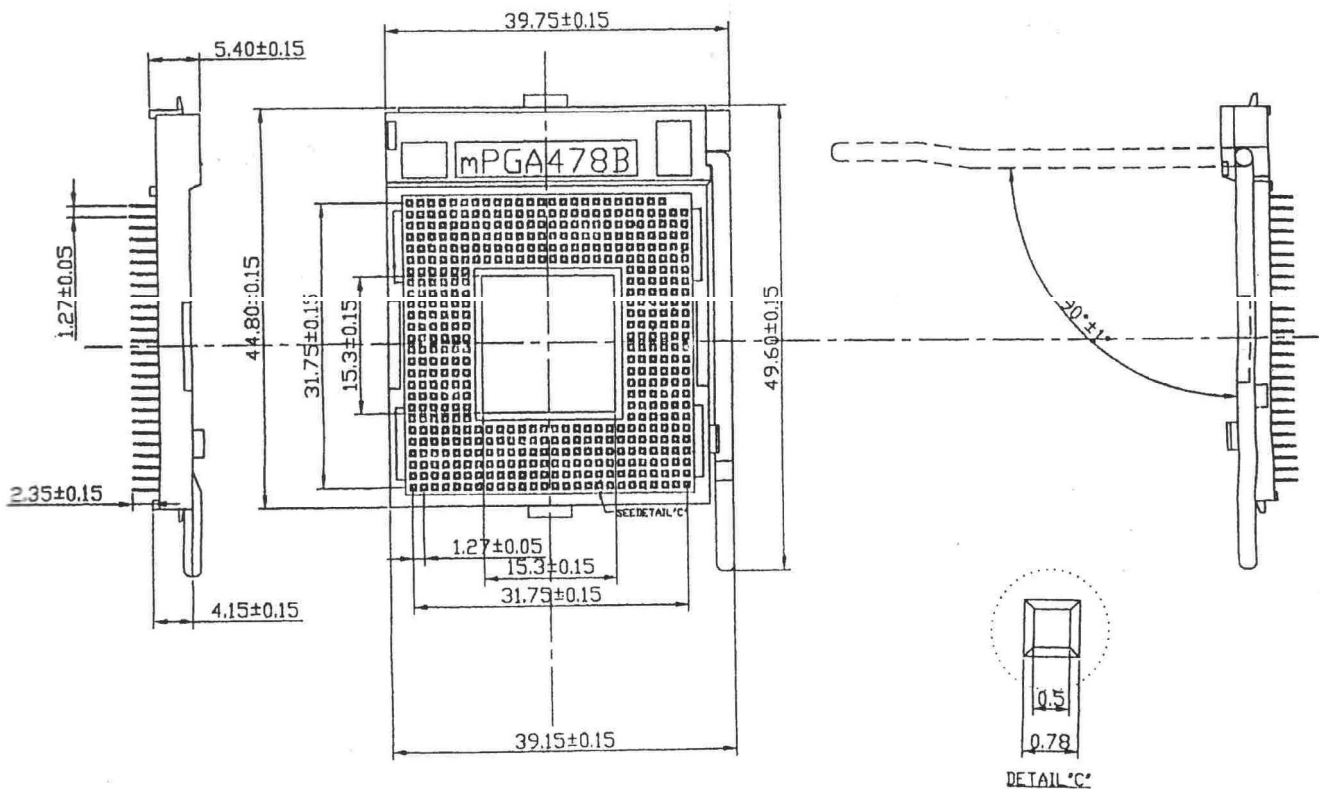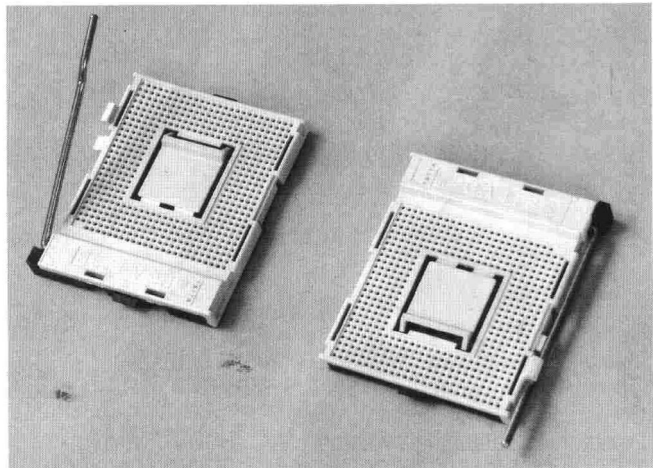

Order Information

PGA	2	478	2
1	2	3	4

1. Series no.PGA
2. NO.of contact :478
3. Contact plating 2- Full gold flash .5- 10u " gold
4. Handle material: 1-Zinc alloy ,high profile 2-Zinc alloy lowprofile