
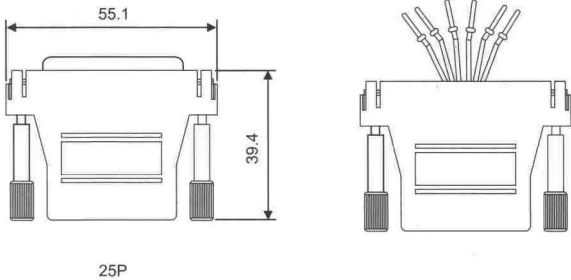
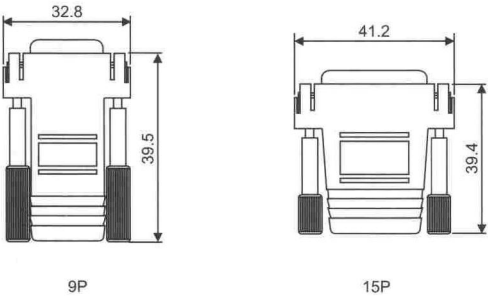
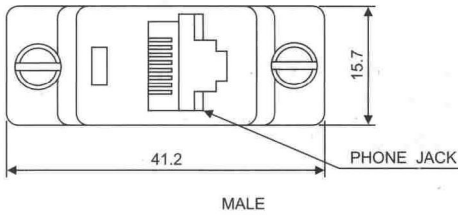
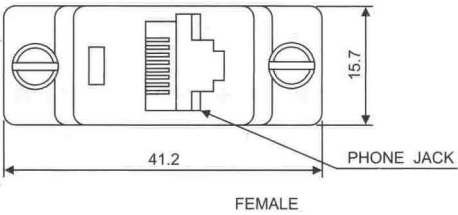
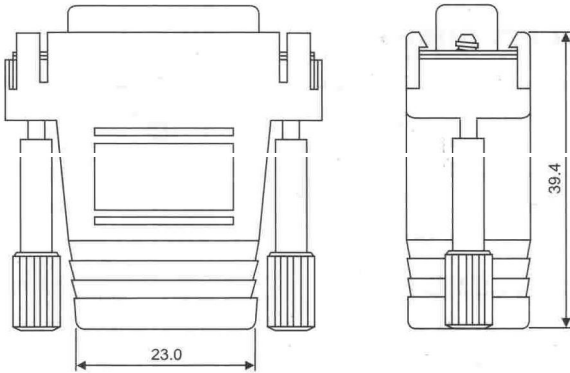
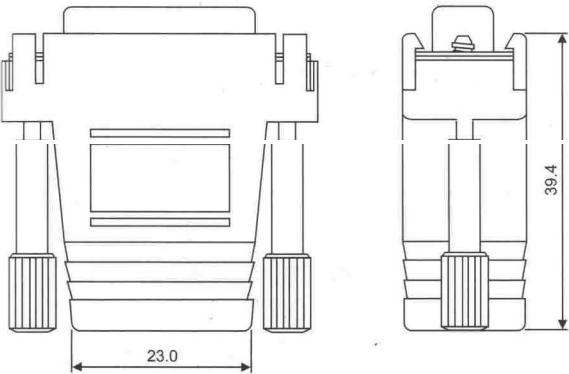
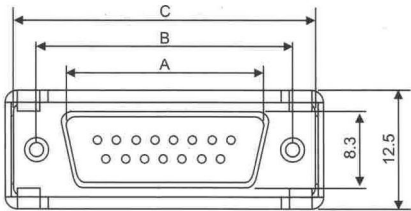
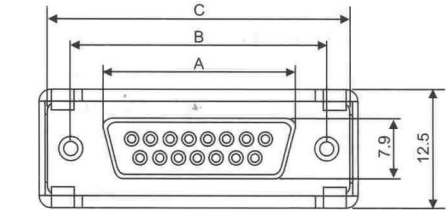


RS232 TO MODULAR JACK

RJ Series

POSITION	A	B	C
9S	16.30	25.00	30.80
15S	24.60	33.30	39.3
25S	38.30	47.10	53.1
37S	54.80	63.50	69.4


POSITION	A	B	C
9P	16.92	25.00	30.80
15 P	25.25	33.30	39.2
25 P	38.96	47.10	53.1
37 P	55.42	63.50	69.4

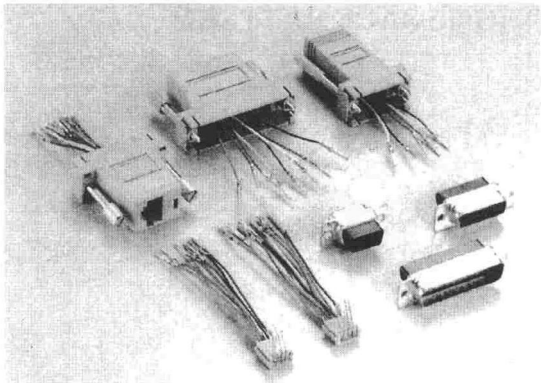


RS232 TO MODULAR JACK

RJ Series

PHONE JACK PATTERN

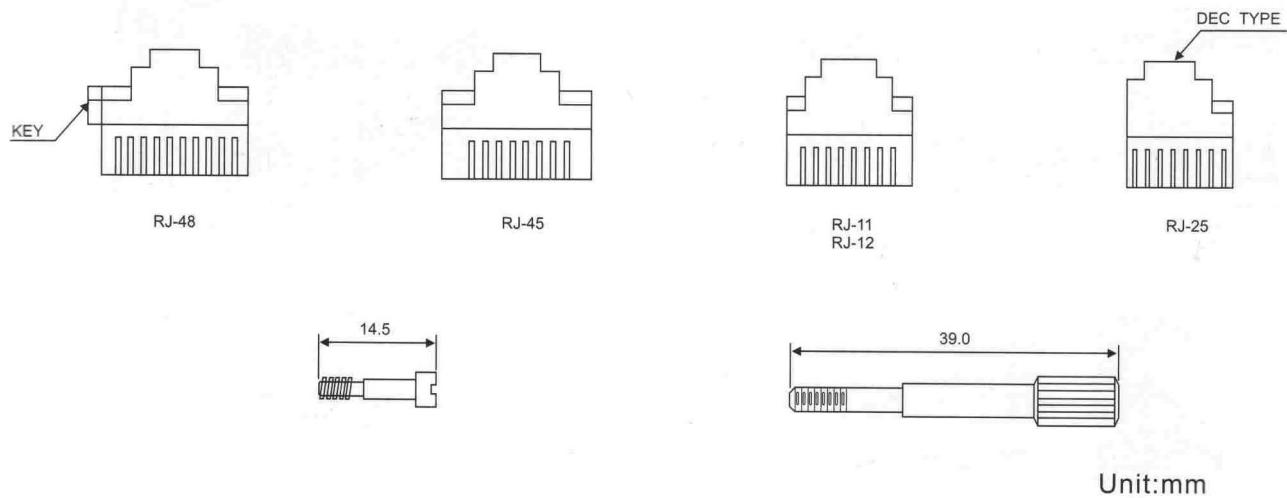

Order Information

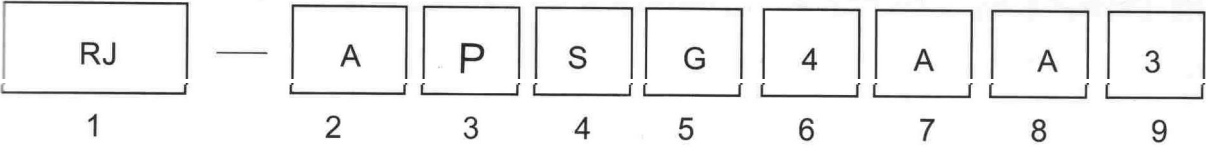

1.SERIES NO .
RJ

C=15 μ "GOLD
D=30 μ "GOLD

7.PARTS OPTIONS
A=LONG SCREWS
B=SHORT SCREWS

2.CONTACT NUMBER
09 15 25 37 50

5.MODULAR JACK PLATING
G=GOLD FLASH
C=15 μ "GOLD
D=30 μ "GOLD

8.INDICATION OPTION
A=STANDARD
C=DEC TYPE

3.CONTACT TYPE
P =MALE
S=FEMALE

6.TYPE OPTION
4=RJ11(6P4C)
6=RJ25(6P6C)
8=RJ45(8P8C)
A=RJ48(10P10C)

9.PLASTIC HOOD COLOR
3=BLACK
4=GREY

4.CONTACT PLATING
S=SELECTIVE GOLD
G=GOLD FLASH
A=5U" GOLD
B=10U" GOLD