

Socket connectors 2.00mm

Single row/double row

Solder tail

Series: SFB

"Hard metric" PCB Socket connectors right angle,
Solder tail

Technical Specs:

Insulator:

Black glass filled polyester PPS-GF30-FR

Flammability:

UL 94V-O

Sleeve:

Brass CuZn 36pb3(36000)

Contact clip (6 finger):

Beryllium copper (C17200)

Mating pin Ø:

0.40 to 0.66 mm or 0.50SQ

Forces:

(polished steel gauge Ø 0.46mm)

-Insertion

0.7 N typ.

-Withdrawal

0.4 N typ.

Mechanical life:

min 500 cycles

Rated current:

3 A

Contact resistance:

max 10 mΩ

Dielectric strength:

min 1000V RMS



Ordering information

SFB - NNN X - A P P 0960A

No. of Positions

Insulator Type code

Pin Plating code

Clip Plating code

1 Single row

2 Double row

1 Tin150µ"

2 Tin200µ"

3 GF

4 Gold2µ"

5 Gold3µ"

6 Gold10µ"

7 Gold15µ"

S Special

1 Tin150µ"

2 Tin200µ"

3 GF

4 Gold2µ"

5 Gold3µ"

6 Gold10µ"

7 Gold15µ"


S Special

SFB-NNN1-APP0960A

Right angle socket connector: solder tail, single row

Availability from: 2 to 40 contacts

Standard number of contacts 40

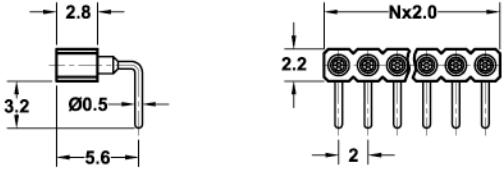

SFB-NNN2-APP0960A

Right angle socket connector: solder tail, double row

Availability from: 4 to 80 contacts

Standard number of contacts 80

