


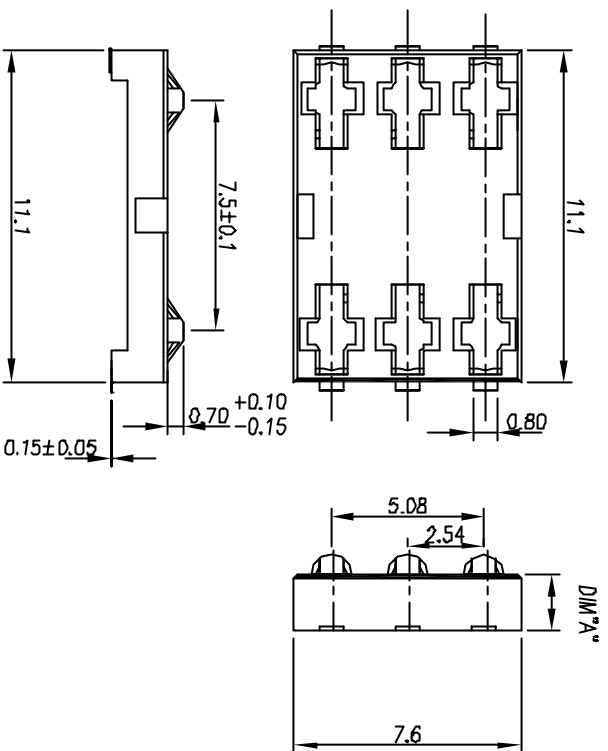

DIMENSIONS: 11.10±0.10*7.60±0.10*1.50±0.10mm


SPECIFICATION:

1. Durability: 100,000 cycle min
2. Contact resistance: 50 mΩ typical, 100 mΩ max
3. Insulation resistance: Pin to pin: >1000 MΩ/Vdc
4. Dielectric withstanding voltage: 500V AC rms 1min. (see level)
5. Operating temperature: -40~+85°C

MATERIAL:

1. Data Contacts Material: Phosphor bronze
2. Data Contacts Plating: Gold or Pd over Nickel
3. Insulation material: Thermoplastic, UL 94V-0

ORDERING INFORMATION :
SIMMP-00601BD05-G

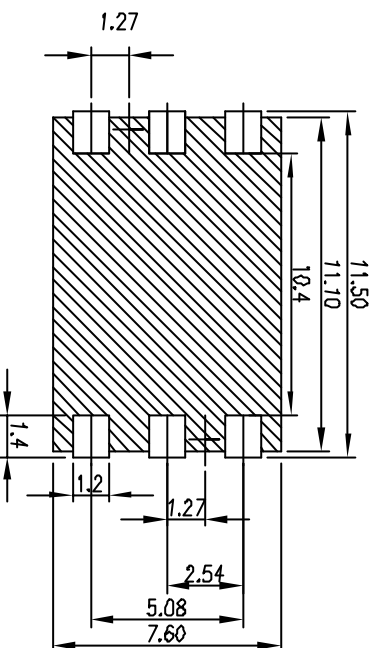

PCB LAYOUT

REV	MODIFICATION	DATE	DRAW

DIMENSION IN mm [inch]		PROD. SPEC.		
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE SIM CARD CONNECTOR	
.XX±0.30	X'±	APPROVE	CUSTOMER DRAWING	
.XX±0.20	X'±	CHECK		
.XX±0.10	.XX'±	DRAW		
			FILE NO.	DWG NO. SIMMP-00601BD05-G
			SIZE A4	PROJ. 4:1
				SHEET 1
				REV A