




# SR10 SERIES

SCSI CONNECTOR RIBBON TYPE, RIGHT ANGLE


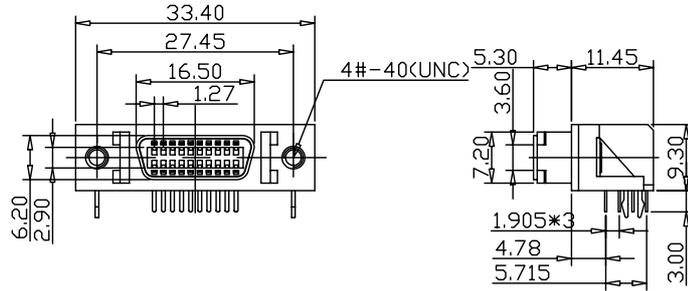


## d: FLANGE LATCH OPTION


0



1

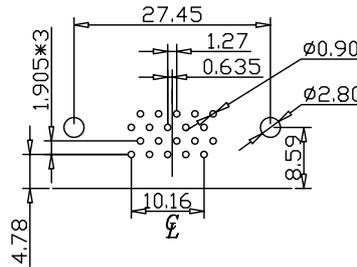

2



SR10



a

b

c

d

e

f

SERIES NO.

### a: NUMBER OF POSITION

- 20: 20-POS. (RIBBON TYPE)
- 36: 36-POS. (RIBBON TYPE)
- 50: 50-POS. (RIBBON TYPE)
- 68: 68-POS. (RIBBON TYPE)

### d: FLANGE LATCH OPTION

- 0: NONE
- 1: LATCH BLOCKS
- 2: LATCH BLOCKS AND RAILS

### f: COLOR STYLE

- 1: BLACK
- 2: WHITH (20POS, RIBBON TYPE)

### b: CONTACT STYLE

- S: SOCKET
- P: PLUG

### e: FLANGE MOUNTING OPTION



- 0: #4-40 THREADED HOLE
- 1: M2.6 THREADED HOLE
- 2: #2-56 THREADED HOLE
- 3: #4-40 THREADED HOLE WITH #4-40UNC SCREWLOCK INSTALLED
- 4: #2-56 THREADED HOLE WITH #4-40UNC SCREWLOCK INSTALLED
- 5: #4-40 THREADED HOLE WITH #4-40UNC SCREWLOCK INSTALLED
- 6: M2.6 THREADED SCREWLOCK CLINCHED-MOUNT INSTALLED
- 7: #2-56 THREADED SCREWLOCK CLINCHED-MOUNT INSTALLED
- 8: M2.5 THREADED HOLE

### c: CONTACT FINISH

- 0: FLASH GOLD
- 1: 15u" GOLD
- 2: 30u" GOLD



# SR10 SERIES

SCSI CONNECTOR RIBBON TYPE, RIGHT ANGLE

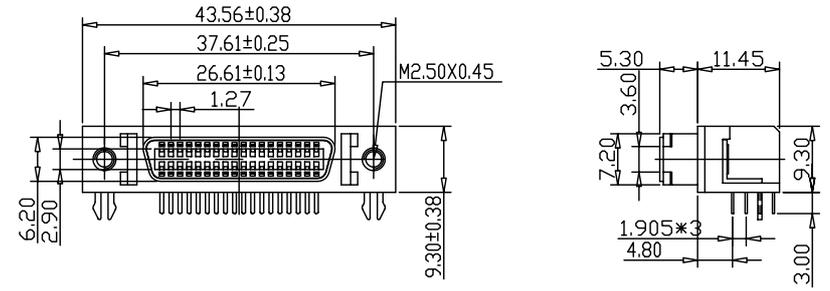
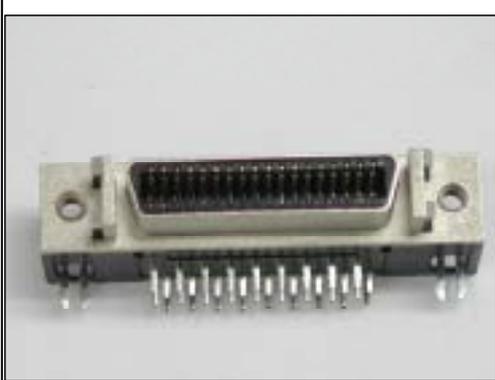


**d: FLANGE LATCH OPTION**



0

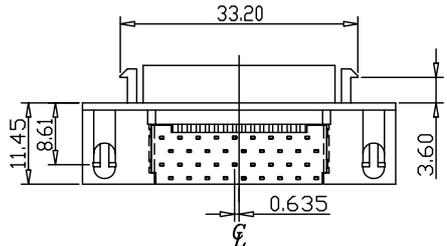

1

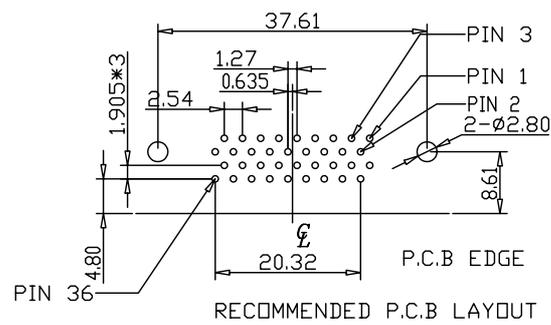

2



**SERIES NO.**

- a: NUMBER OF POSITION**  
 20: 20-POS. (RIBBON TYPE)  
 36: 36-POS. (RIBBON TYPE)  
 50: 50-POS. (RIBBON TYPE)  
 68: 68-POS. (RIBBON TYPE)

- d: FLANGE LATCH OPTION**  
 0: NONE  
 1: LATCH BLOCKS  
 2: LATCH BLOCKS AND RAILS

- f: COLOR STYLE**  
 1: BLACK  
 2: WHITE (20POS, RIBBON TYPE)

- b: CONTACT STYLE**  
 S: SOCKET  
 P: PLUG

- e: FLANGE MOUNTING OPTION**  
 0: #4-40 THREADED HOLE  
 1: M2.6 THREADED HOLE  
 2: #2-56 THREADED HOLE  
 3: #4-40 THREADED HOLE WITH #4-40UNC SCREWLOCK INSTALLED  
 4: #2-56 THREADED HOLE WITH #4-40UNC SCREWLOCK INSTALLED  
 5: #4-40 THREADED HOLE WITH #4-40UNC SCREWLOCK INSTALLED  
 6: M2.6 THREADED SCREWLOCK CLINCHED-MOUNT INSTALLED  
 7: #2-56 THREADED SCREWLOCK CLINCHED-MOUNT INSTALLED  
 8: M2.5 THREADED HOLE

- c: CONTACT FINISH**  
 0: FLASH GOLD  
 1: 15u" GOLD  
 2: 30u" GOLD