

TO sockets


Solder tail

B Type

Series: STR

Technical Specs:

Insulator: Glass filled polyester PBT-GF30-FR
Fiammability: UL 94V-O
Sleeve: Brass CuZn 36pb3(36000)
Contact clip (4 finger): Beryllium copper (C17200)
Mating pin Ø: 0.30 to 0.35 mm
Forces: (polished steel gauge Ø 0.31mm)
-Insertion 0.2 N typ.
-Withdrawal 0.15N typ.
Mechanical life: min 100 cycles
Rated cument: 1 A
Contact resistance: max 10 mΩ
Dielectric strength: min 500V_{RMS}




Ordering information

STR - NNN X - A P P 1250A

No. of Positions	Insulator Type code	Pin Plating code	Clip Plating code
	1 A Type	1 Tin150µ"	1 Tin150µ"
	2 B Type	2 Tin200µ"	2 Tin200µ"
		3 GF	3 GF
		4 Gold2µ"	4 Gold2µ"
		5 Gold3µ"	5 Gold3µ"
		6 Gold10µ"	6 Gold10µ"
		7 Gold15µ"	7 Gold15µ"
		S Special	S Special

STR-NNN1-APP1250A

TO sockets: solder tail ,3 contacts with A type

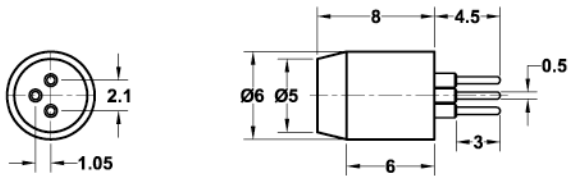

STR-NNN2-APP1840A

TO sockets: solder tail ,3 contacts with B type

