

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVSER	APPD

Note:

1.Material:



- 1.1 Insulator: P.B.T UL 94-V0 rated.
1.2 Contact:Brass ,t=0.25mm.
1.3 Shell: Cold Rolled Steel,t=0.35mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
2.3 Contact resistance: 30 mΩ Max.
2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
2.5 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u ”,3u ”,5u ”,10U ”,15u ”,30u ”.
3.2 Shell: Nickel plated.

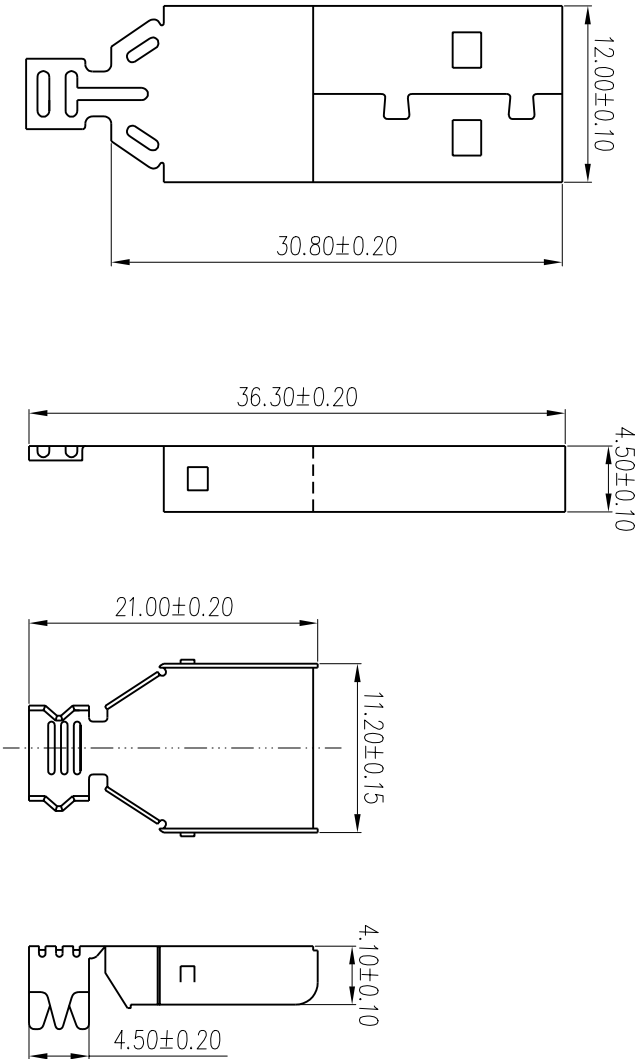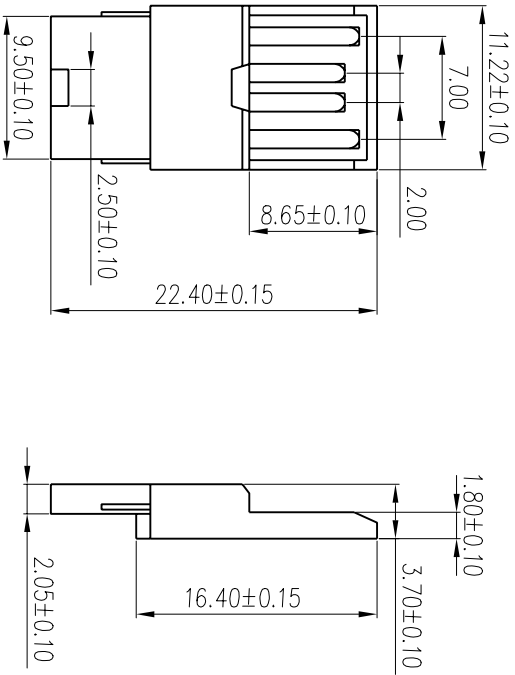

4	Back-shell	1	Cold Rolled Steel	T=0.35mm	Nickel Plated
3	Front-shell	1	Cold Rolled Steel	T=0.35mm	Nickel Plated
2	Contact	4	Brass	T=0.20mm	Gold Flashed
1	Housing	2	P.B.T	UL 94-V0	Black/Ivory
No.	Name	Q'ty	Material	Remarks&Thickness	Finish

PART NO:		MATERIAL:			
MODEL NO:		FINISH:			
UNIT:	mm	SIZE:	A4	COLOR:	
TOLERANCE UNSPECIFIED		DR:黄義强		06/04/06	
.x	±0.30	CHK:Kevin		06/04/06	
.xx	±0.20	APP: Kent		06/04/06	
.xxx	±0.10	SCALE:		2:1	
ANG.	±T	SHEET:		1 of 1	
		DWG NO:		S/A-277	
		REV:		A0	

USB-A TYPE SOLDER(M) 三件式