

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVSER	APPD

Note:

1.Material:

1.1 Insulator: P.B.T UL 94-V0 rated.

1.2 Contact: Brass, $t=0.25mm$.

1.3 Shell: Cold rolled steel, $t=0.30mm$.

2.Specification:

2.1 Current rating: 1 A Max.

2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.

2.3 Contact resistance: 30 mΩ Max.



2.4 Insulation resistance: 1000 MΩ Min at DC 500V.

2.5 Temperature range: $-55^{\circ}C\sim+105^{\circ}C$

3.Finishes:

3.1 Contacts:Gold flashed 1u",3u",5u",10u",15u",30u".

3.2 Shell: Nickel,tin plated

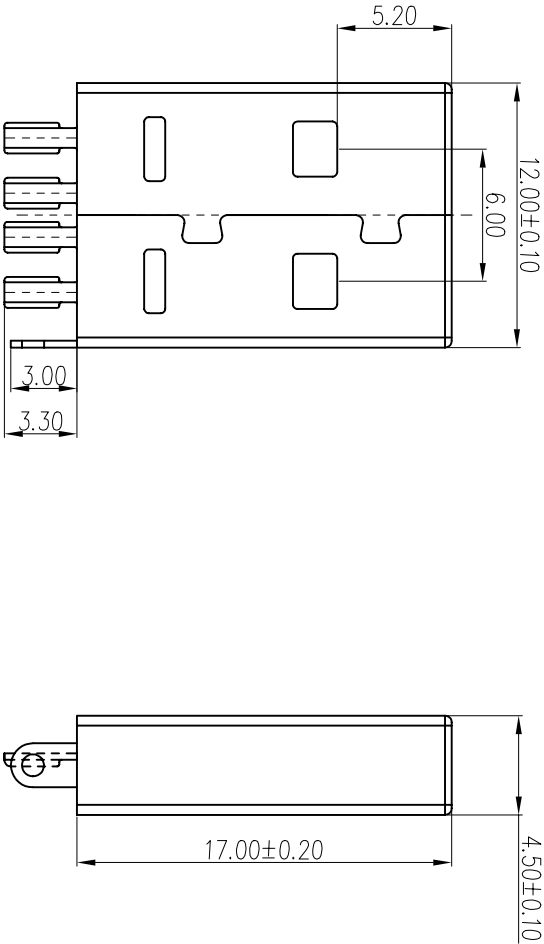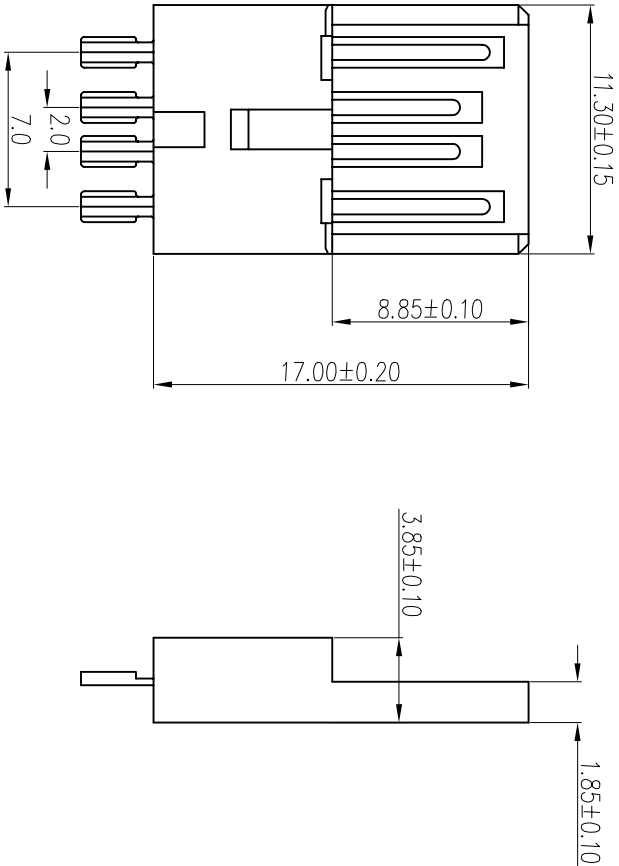

3	Shell	1	Cold Rolled Steel	T=0.30mm	Nickel Plated
2	Contact	4	Brass	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/White
No.	Part Name	Q'ty	Material	Remarks&Thickness	Finish

PART NO:	MATERIAL:				
MODEL NO:	FINISH:				
UNIT: mm	SIZE:A4	COLOR:	PART NAME: USB-A公母線式短鐵殼		
TOLERANCE UNSPECIFIED		DR: 黃義強	06/04/05		
.x	±0.30	CHK: Kevin	06/04/05	DWG NO:	S/A-275
.xx	±0.20	AP: Kent	06/04/05	SCALE:	3:1
.xxx	±0.10			SHEET:	1 of 1
ANG.	±1°				REV: A0