
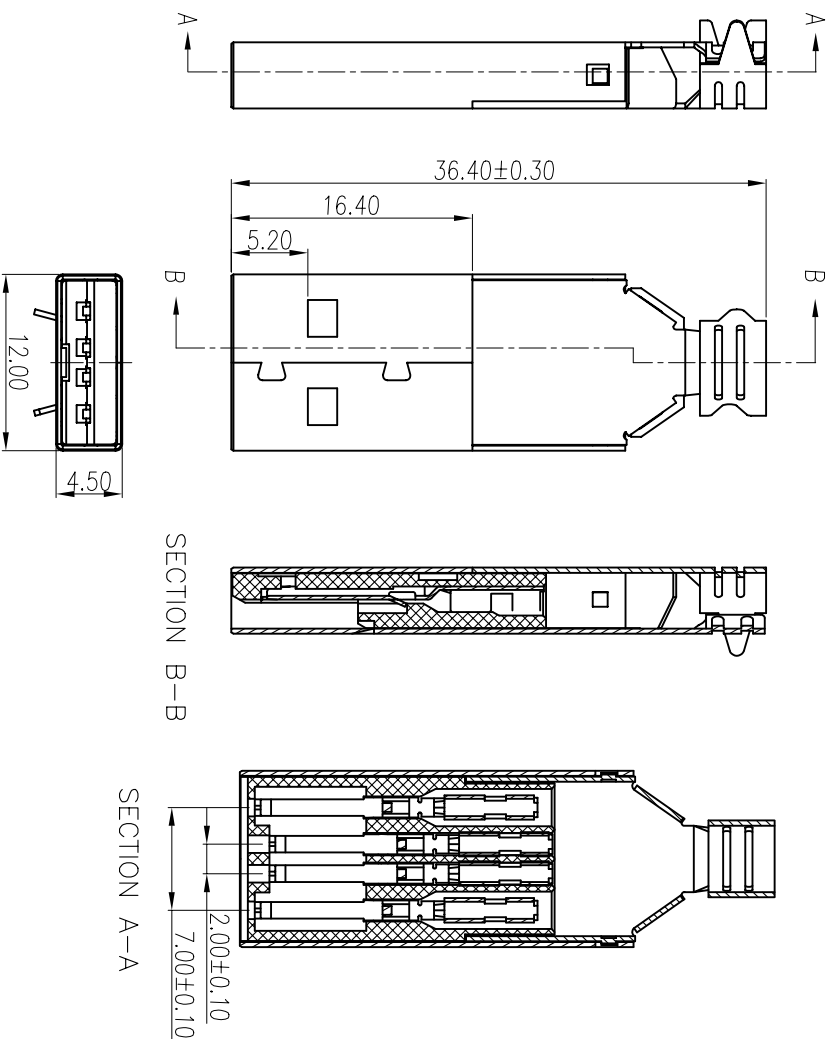


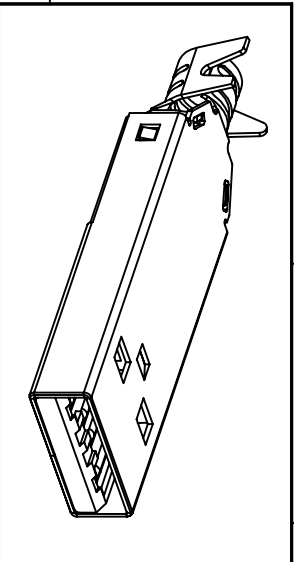

Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C

| REV. | ECN NO | LOCATIONS | DESCRIPTION | DATE | REVISER | APPD |
|------|--------|-----------|-------------|------|---------|------|
|      |        |           |             |      |         |      |

|                       |              |      |                     |                   |                                                                                                            |
|-----------------------|--------------|------|---------------------|-------------------|------------------------------------------------------------------------------------------------------------|
| 4                     | Shell        | 2    | Cold rolled steel   | T=0.35mm          | Cu:40u"min. 80~120u"Nickel Plated                                                                          |
| 3                     | Higt-Contact | 2    | Brass               | T=0.25mm          | Contact area:0.8~1.2u"Gold Plated over 40u"Nickel min. Solder area:80~120u"Tin Plated over 40u"Nickel min. |
| 2                     | Low-Contact  | 2    | Brass               | T=0.25mm          | Contact area:0.8~1.2u"Gold Plated over 40u"Nickel min. Solder area:80~120u"Tin Plated over 40u"Nickel min. |
| 1                     | Housing      | 1    | P.B.T               | UL 94-V0          | Black                                                                                                      |
| No.                   | Name         | Q'ty | Material            | Remarks&Thickness | Finish                                                                                                     |
| PART NO:              |              |      | MATERIAL:           |                   |                                                                                                            |
| MODEL NO:             |              |      | FINISH:             |                   |                                                                                                            |
| UNIT: mm              |              |      | COLOR:              |                   |                                                                                                            |
| SIZE: A4              |              |      | PART NAME:          |                   |                                                                                                            |
| TOLERANCE UNSPECIFIED |              |      | USB-A(M)包線式 (線徑4.2) |                   |                                                                                                            |
| .x ±0.3               |              |      | DWG NO:             |                   |                                                                                                            |
| .xx ±0.20             |              |      | S/A-276-01          |                   |                                                                                                            |
| .xxx ±0.100           |              |      | SHEET: 1 of 1       |                   |                                                                                                            |
| ANG. ±1°              |              |      | REV: A0             |                   |                                                                                                            |