
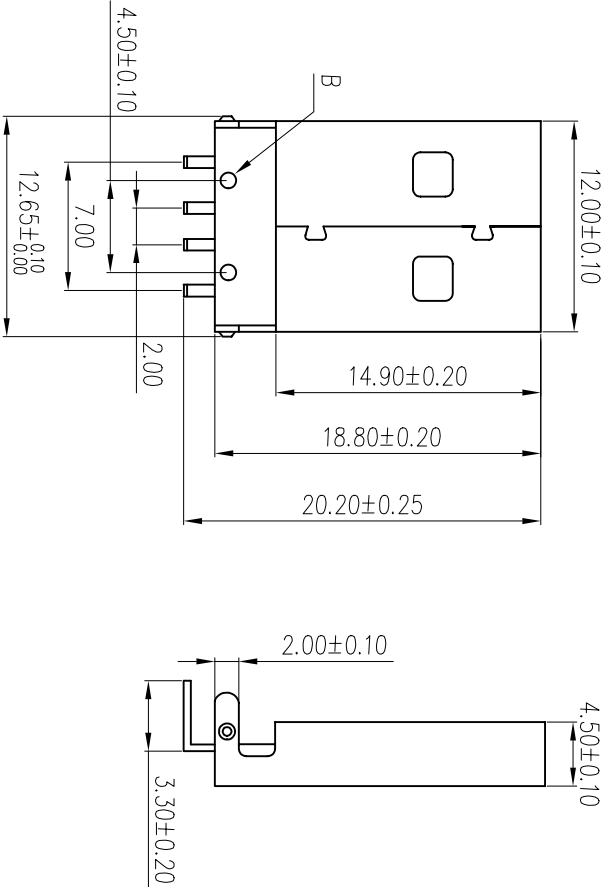


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Note:

1.Material:

- 1.1 Insulator: L.C.P UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.25mm.
- 1.3 Shell: Cold rolled steel,t=0.30mm.


2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55°C~+240°C

3.Finishes:

- 3.1 contacts:Gold flashed 1u",3u",5u",10u",15u",30u".
- 3.2 Shell: Nickel plated.

類別	尺寸	採用
A 鐵殼種類	長腳(5.90±0.10)	
	中腳(5.00±0.10)	
	短腳(4.50±0.10)	
B 膠芯種類	固定柱(ø1.00±0.10)	
	固定柱(ø1.3±0.1)	
材料搭配		

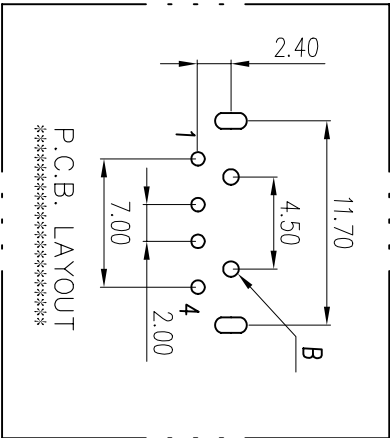

PART NO:		MATERIAL:		PART NAME:			
MODEL NO:		FINISH:		USB-A TYPE (M) 90°			
UNIT:	mm	SIZE:	A4				
TOLERANCE UNSPECIFIED		COLOR:					
.x	±0.3	DR: 黃義強 '06/04/11		DWG NO:	S/A-283	REV:	A0
.xx	±0.20	CHK: Song '06/04/11		SCALE:	2:1	SHEET:	1 of 1
.xxx	±0.100	APP: Kent '06/04/11					
AVG.	±1°						
3		Shell	1	Cold rolled steel	T=0.30mm	Nickel Plated	
2		Contact	4	Brass	T=0.25mm	Gold Flashed	
1		Housing	1	L.C.P	UL 94-V0	Black/Ivory	
No.		Name	Q'ty	Material	Remarks&Thickness	Finish	