
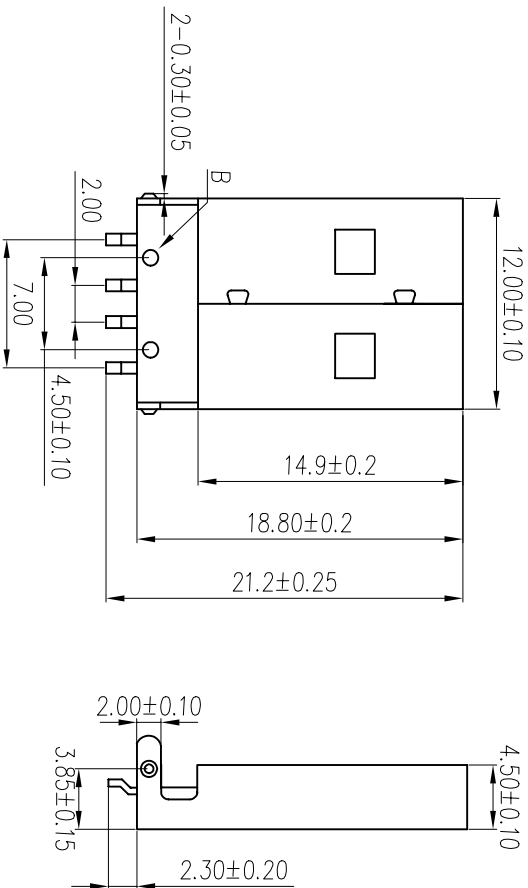


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REWSEK	APPD



Note:

1.Material:


- 1.1 Insulator: L.C.P UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.25mm.
- 1.3 Shell: Cold rolled steel,t=0.30mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55℃~+105℃

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell: Nickel plated. or Tin plated.

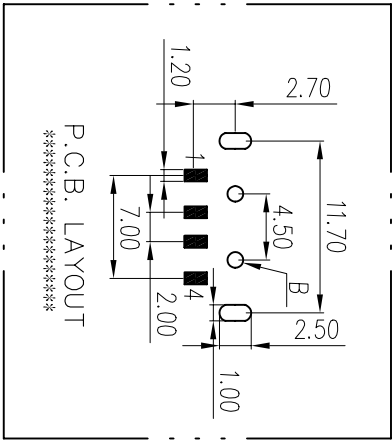

類別	尺寸	採用
A 鐵殼種類	長腳(5.90±0.15)	
	中腳(5.00±0.15)	
B 膠芯種類	短腳(4.50±0.15)	
	固定柱(ø1.00±0.10)	
材料搭配		
固定柱(ø1.30±0.10)		

3	Shell	1	Cold rolled steel	T=0.30mm	Nickel Plated
2	Contact	4	Brass	T=0.25mm	Gold Flashed
1	Housing	1	L.C.P	UL 94-V0	Black/Ivory
No.	Name	Q'ty	Material	Remark &Thickness	Finish
PART NO:		MATERIAL:			
MODEL NO:		FINSH:			
UNIT:	mm	SIZE:	A4	COLOR:	PART NAME: USB-A TYPE (M)S.M.T
TOLERANCE UNSPECIFIED					
.x ±0.3					
.xx ±0.20					
.xxx ±0.100					
ANG.		±1°		APP: Kent	'06/04/11
DWG NO:		S/A-282		REV: A0	
SCALE:		2:1		SHEET: 1 of 1	
				