

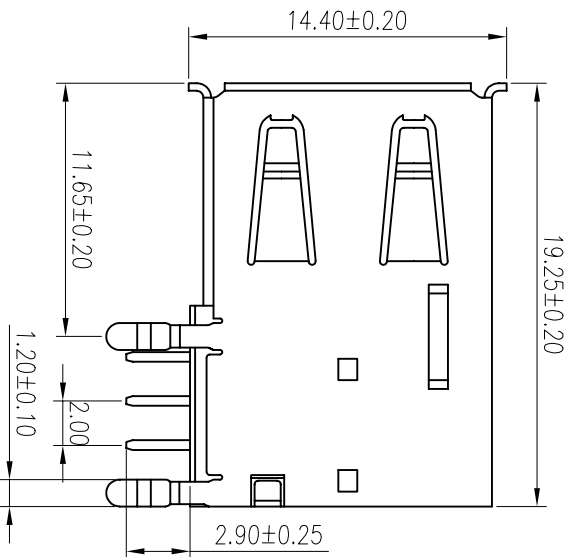
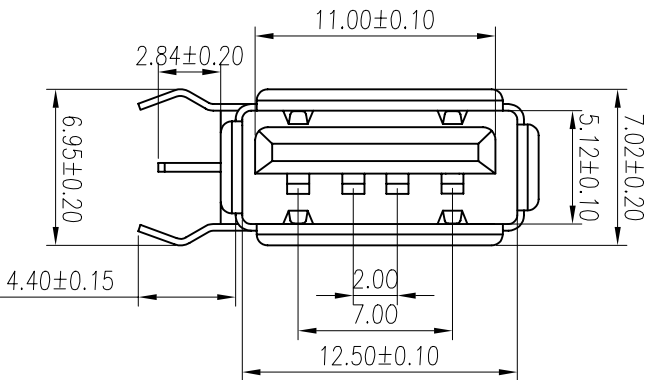


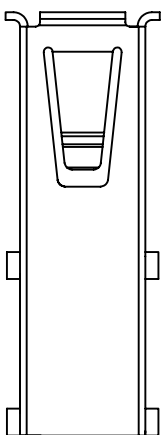

PROFILE OF CONNECTOR

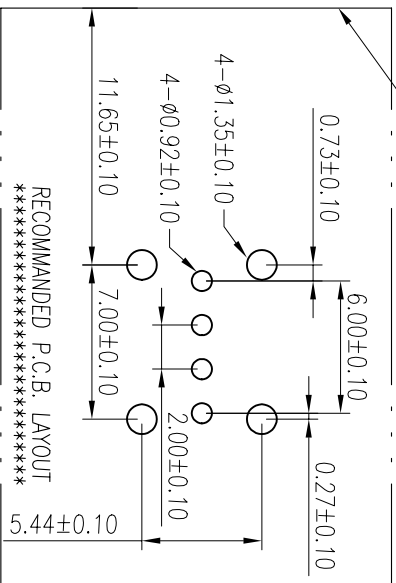

Note:

1.Material:

- 1.1 Insulator: P.B.T G.F. UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.25mm.
- 1.3 Shell: Brass,t=0.30mm.

2.Specification:

- 2.1 Rated voltage and current:1.5A at 250V AC minimum.
- 2.2 Dielectric withstanding voltage: 500V AC/1 minute without breakdown.
- 2.3 Contact resistance:Before life test 30m ohm max,
After life tset 50m ohm max.
- 2.4 Insulation resistance:1000M ohm min.
- 2.5 Insertion force:35 Newtons maximum.
- 2.6 Extraction force:10 Newtons minimum.
- 2.7 Solderability:Terminal shall be immersed in flux before text,Then dip
in molten solder for 5±0.5 sec. At 245±5°C.

3.Finishes:

- 3.1 Contacts:Gold flashed 1u ",3u ",5u ",10U ",15u ",30u " .
- 3.2 Shell: Nickel plated.

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

3	Back-Shell	1	Cold rolled steel	T=0.30mm	Nickel Plated
3	Shell	1	Brass	T=0.30mm	Nickel Plated
2	Contact	4	Brass	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Ivory
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:	MATERIAL:				
MODEL NO:	FINSH:				
UNIT: mm	SIZE: A4	COLOR:	PART NAME:		
TOLERANCE UNSPECIFIED		DR: 李霞	USB-A TYPE P.C.B(F)侧向90°		
.x	±0.3	CHK:Kevin	DWG NO:	S/A-296	REV: AO
.xx	±0.20	APP:Kent	SCALE:	3:1	SHEET: 1 of 1
.xxx	±0.100				
ANG.	±1°				