

REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

1.Material:


- 1.1 Insulator: P.B.T UL 94-V0 rated.
1.2 Contact: Brass,t=0.25mm.
1.3 Shell: Brass ,t=0.30mm.

2.Specification:

- 2.1 Rated voltage and current: 1.5A at 250V AC minimum.x.
2.2 Dielectric withstanding voltage: 500V AC/1 minute without breakdown.
2.3 Contact resistance:Before life test 30m ohm Max.
After life test 50m ohm max
2.4 Insulation resistance: 1000M ohm Min at DC 500V.
2.5 Insertion force: 35 Newtons Max.
2.6 Extraction force: 10 Newtons Minimum.
2.7 Solderability:Terminal shall be immersed in flux before text,Then dip in molten solder for 5±0.5 sec. At 245±5℃

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
3.2 Shell: Nickel plated.

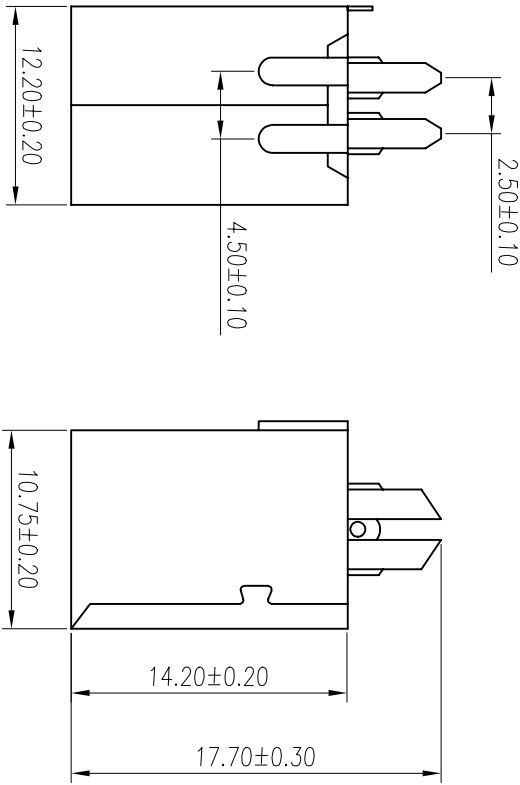

3	Shell	1	Brass	T=0.30mm	Nickel Plated
2	Contact	4	Brass	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Ivory/White
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:			MATERIAL:		
MODEL NO:			FINSH:		
UNIT:	mm	SIZE: A4	COLOR:		
TOLERANCE UNSPECIFIED			PART NAME:		
.x ±0.3			USB-B TYPE SOLDER(F)		
.xx ±0.20			DWG NO:		
.xxx ±0.100			S/A-311		
ANG. ±1°			REV: A0		
CHK: Kevin '06/05/09			SCALE: 2:1		
APP: Kent '06/05/09			SHEET: 1 of 1		