


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

- Note:
- 1.Material:
- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.25mm.
- 1.3 Shell: Brass ,t=0.30mm.

- 2.Specification:
- 2.1 Rated voltage and current: 1.5A at 250V AC minimum.x.
- 2.2 Dielectric withstanding voltage: 500V AC/1 minute without breakdown.
- 2.3 Contact resistance:Before life test 30m ohm Max.
After life test 50m ohm max
- 2.4 Insulation resistance: 1000M ohm Min at DC 500V.
- 2.5 Insertion force: 35 Newtons Max.
- 2.6 Extraction force: 10 Newtons Minimum.
- 2.7 Solderability:Terminal shall be immersed in flux before text,Then dip in molten solder for 5±0.5 sec. At 245±5°C

- 3.Finishes:
- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell: Nickel plated.

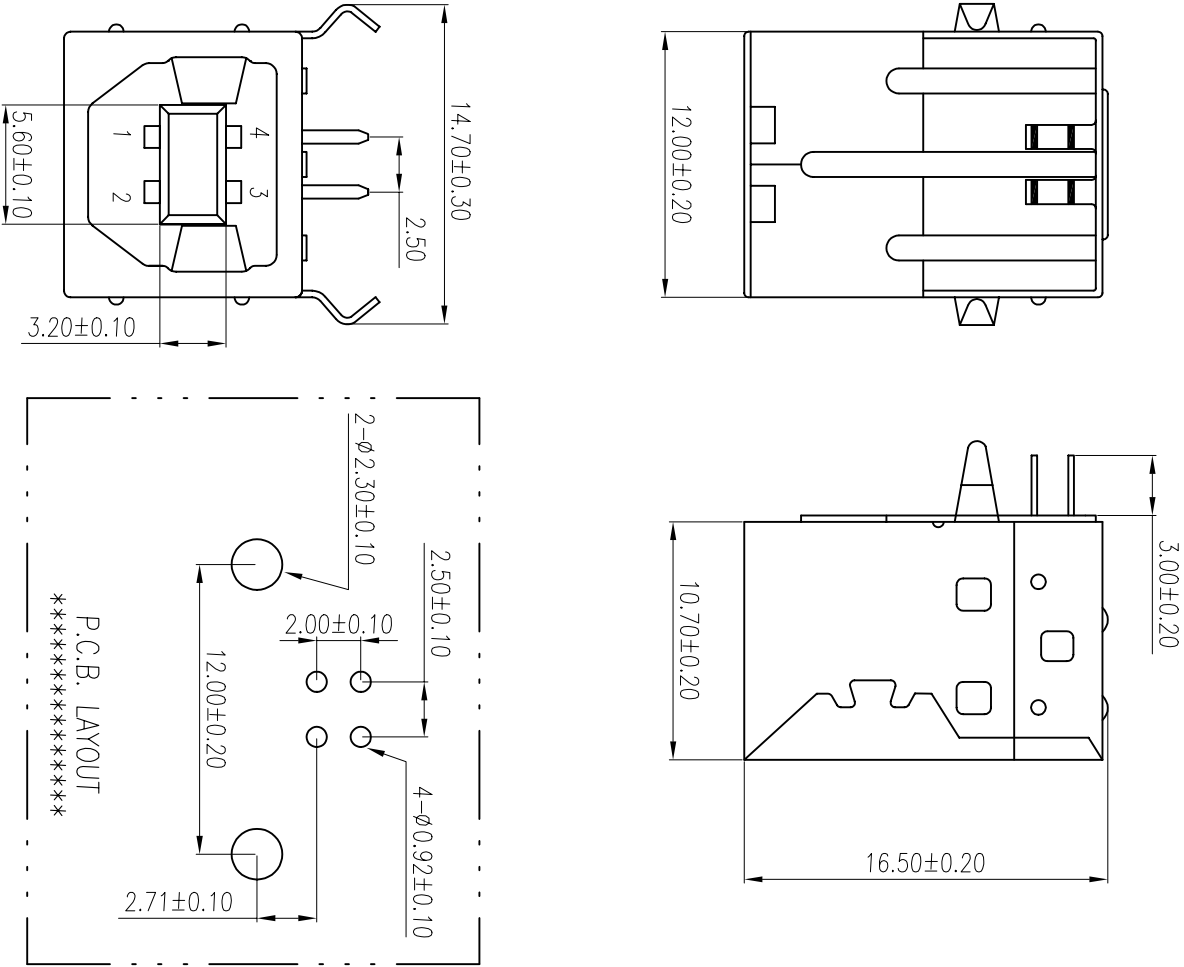

4	Back-shell	1	Gold rolled steel	T=0.30mm	Nickel Plated
3	Shell	1	Brass	T=0.30mm	Nickel Plated
2	Contact	4	Brass	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Ivory
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO:	MATERIAL:				
MODEL NO:	FINSH:				
UNIT: mm	SIZE: A4	COLOR:	PART NAME: USB-B TYPE P.C.B(F)90°		
TOLERANCE UNSPECIFIED		DR: 李霞	06/05/09	DWG NO:	S/A-312
.x	±0.3	CHK:Kevin	06/05/09	SCALE:	2:1
.xx	±0.20	APP: Kent	06/05/09	SHEET:	1 of 1
.xxx	±0.100			REV:	A0
ANG.	±1°				