
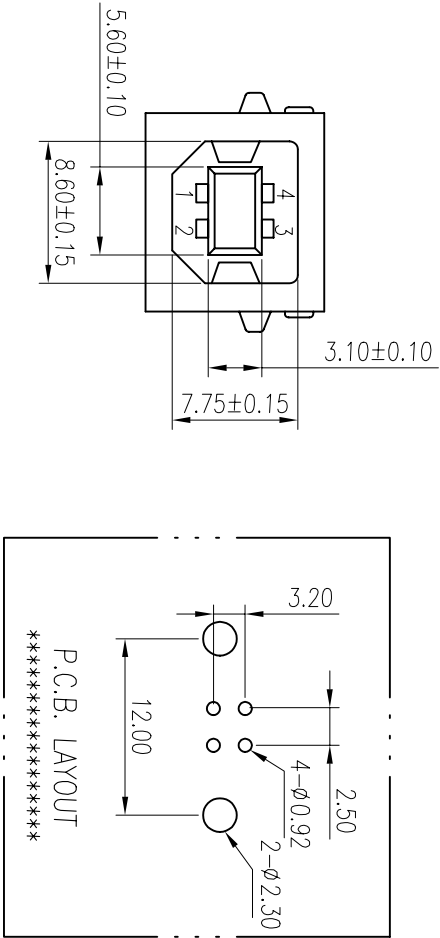


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

- Note:
- 1.Material:
- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Phosphor bronze,t=0.25mm.
- 1.3 Shell: Brass ,t=0.30mm.

2.Specification:

- 2.1 Rated voltage and current: 1.5A at 250V AC minimum.x.
- 2.2 Dielectric withstanding voltage: 500V AC/1 minute without breakdown.
- 2.3 Contact resistance:Before life test 30m ohm Max.
After life test 50m ohm max
- 2.4 Insulation resistance: 1000M ohm Min at DC 500V.
- 2.5 Insertion force: 35 Newtons Max.
- 2.6 Extraction force: 10 Newtons Minimum.
- 2.7 Solderability:Terminal shall be immersed in flux before text,Then dip in molten solder for 5±0.5 sec. At 245±5°C
- 3.Finishes:
- 3.1 Contacts:Gold flashed 1u ",3u ",5u ",10U ",15u ",30u " .
- 3.2 Shell: Nickel plated.

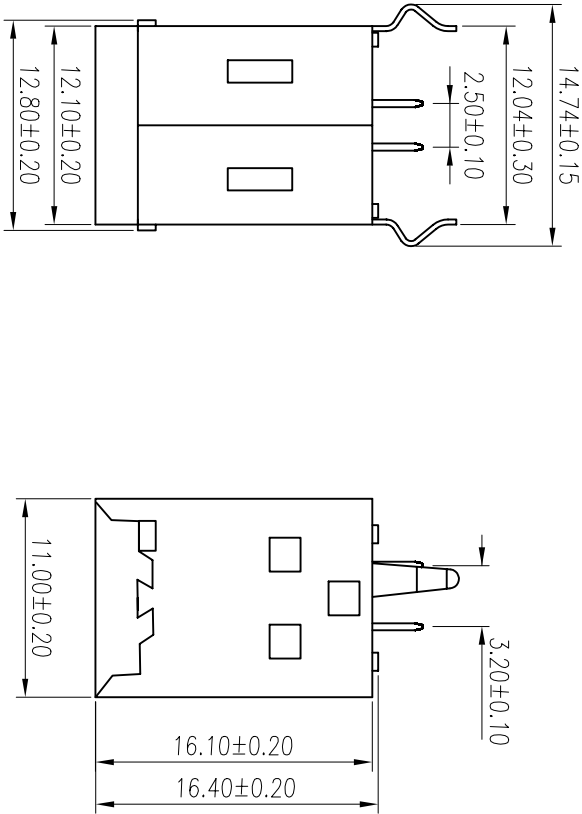

3	Shell	1	Brass	T=0.30mm	Nickel Plated	Common	Nontoxic
2	Contact	4	Phosphor bronze	T=0.25mm	Gold Flashed	Common	Nontoxic
1	Housing	1	P.B.T	UL 94-V0	Black/Ivory	Common	Nontoxic
No.	Name	Q'ty	Material	Remarks & Thickness			
PART NO:		MATERIAL:		Finish			
MODEL NO:		FINSH:		Entirnement			

PART NO:		MATERIAL:		PART NAME: USB-B TYPE P.B.C (F)180°			
MODEL NO:		FINISH:					
UNIT: mm		SIZE: A4					
		COLOR:					
TOLERANCE UNSPECIFIED							
.x		±0.3		DWG NO:		REV:	
.xx		±0.20		S/A-313		A0	
.xxx		±0.100					
ANG.		±1°		SCALE: 2:1		SHEET: 1 of 1	
							