

Part Number : W2SD-172-A4A-3B2B1

A: Gold Flash B: 5U" C: 10U"

4: Four Card Slot

A: (1.5V) B: (3.3V)

⊥₁: With Stopper(TYAN), Dark Brown

—P: Phosphor Bronze B: Brass

—2: Brown 4: Blue 7: Green 8: Purple

—P: PPS B: PBT N: Nylon

—2: Plastic 3: Metal Posts

◆ Material

Body High Temperature Thermoplastic.
Rated UL 94V-0.

Contacts Copper alloy.

Retention Clip Copper alloy.

Contact Plating Gold Plating Over Nickel on Contact
Area Tin/Lead Plating on Terminal.

◆ Mechanical




Contact Resistance 10 Milliohms Max. in Initial.

Insulation Resistance 1000 Megohms Min.


Withstanding Voltage 500 VAC. 1 Minute.

Current Rating 1 Ampere.

Capacitance 2 PF Max.

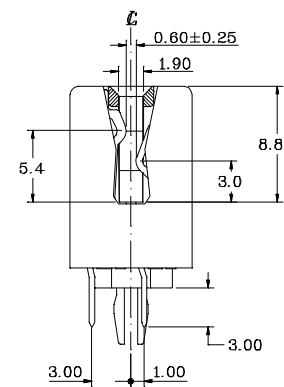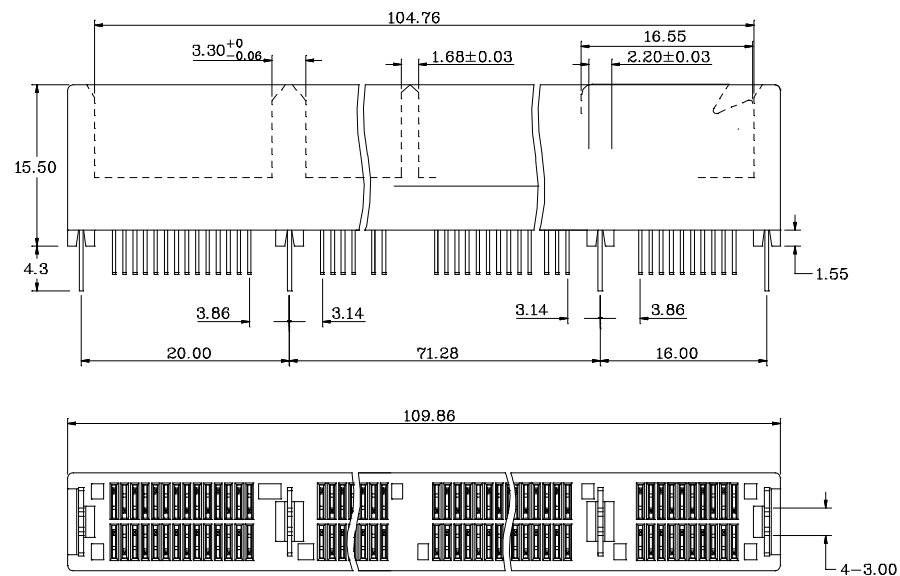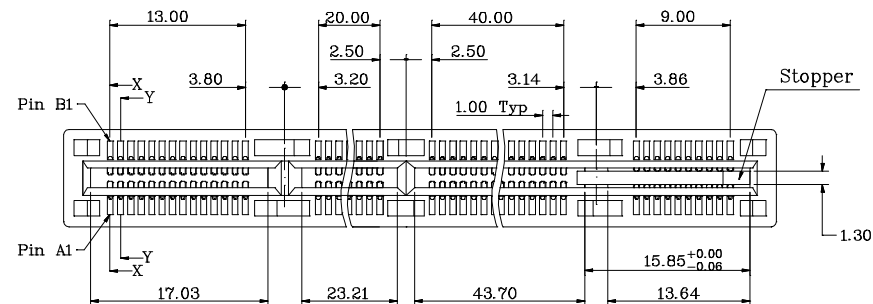

Section X-X

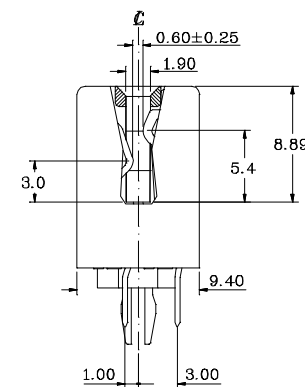

Section Y-Y

			未 註 入 公 差 Tolerance Unless Otherwise Specified	設 計 Designed	製 圖 Drawing	檢 圖 Reviewed	承 認 Approved	單 位 Unit	mm	比 例 尺 Scale	Third Angle Projection	
品 名 P/Name	AGP Loose Piece Pins Connectors(Stopper)		.X ~ ±0.38					日 期 Date		12/17/02	Sheet	1 Of 1
			.XX ~ ±0.25					圖 名 Name	W2SD 172P(Stopper)承認圖(1.5V)		REV	
			.XXX ~ ±0.20					圖 號 Drawing No.	W2SD-172MD-AN-W141		A	
			Angle ~ ± 3'									

