

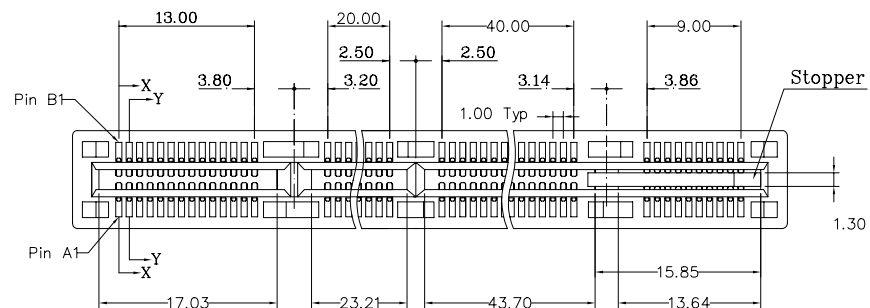


Section X-X

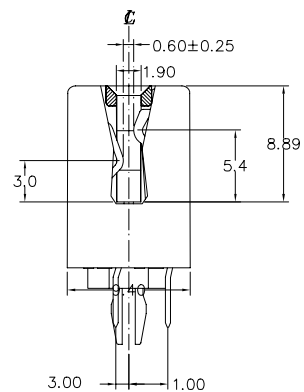

Section Y-Y

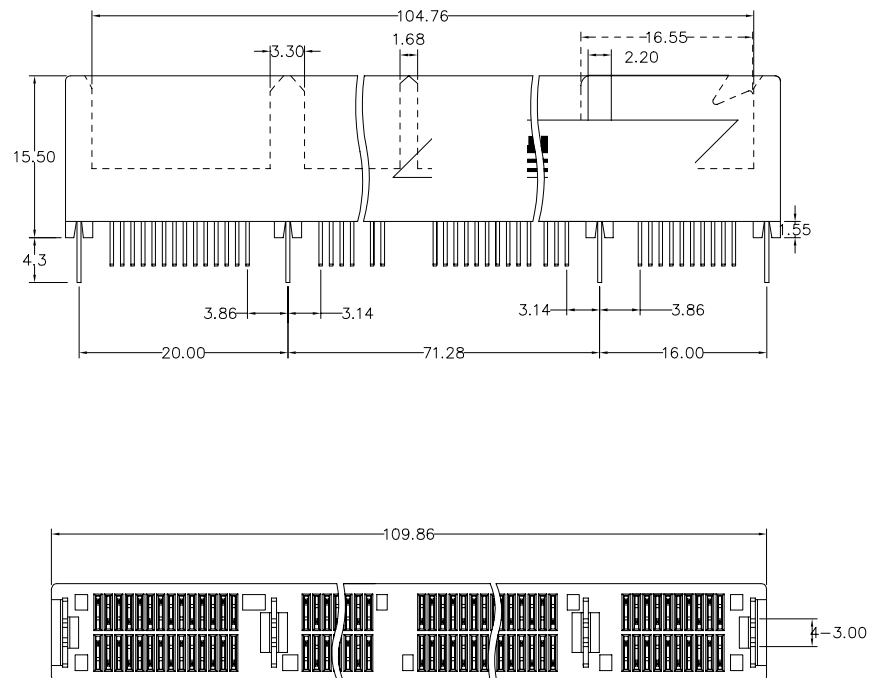

◆ Material

Body : High Temperature Thermoplastic. Rated UL 94V-0.
Contacts : Copper alloy.
Retention Clip : Copper alloy.
Contact Plating : Gold Plating Over Nickel on Contact
Area Tin Plating on Solder Tail.

◆ Mechanical

Contact Resistance : 10 Milliohms Max. in Initial.
Insulation Resistance : 1000 Megohms Min.
Withstanding Voltage : 500 VAC. 1 Minute.
Current Rating : 1 Ampere.
Capacitance : 2 PF Max.

◆ How to Order

W2SD-172A4A3B2B1U

L: Lead Free Blank: Sn Pb
 1: With Stopper (TYAN), Dark Brown
 P: Phosphor Bronze B: Brass
 2: Brown 4: Blue 7: Green 8: Purple
 P: PPS B: PBT N: Nylon
 2: Plastic 3: Metal Posts
 A: (1.5V) B: (3.3V)
 4: Four Card Slot
 A: Gold Flash B: 5U" C: 10U"

REV														
Units	mm	Scale		Drawing By		Data								
Tolerance Unless Otherwise Specified				Reviewed By		Data		Date			Title	Slot 172P Loose Pin Stopper (1.5V)		
								Sheet	1 of 1					
				Approval By		Data		Third Angle Projection						
										Drawing No.				REV
.X ~ ±0.38														
.XX ~ ±0.25														
.XXX ~ ±0.20														
Angle ~ ± 3°														