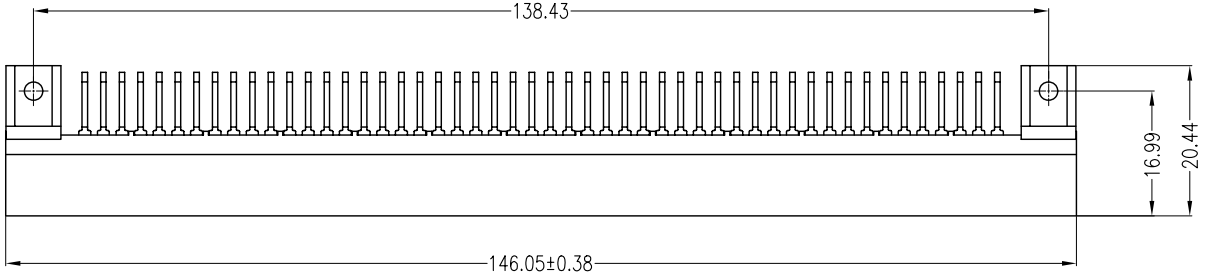

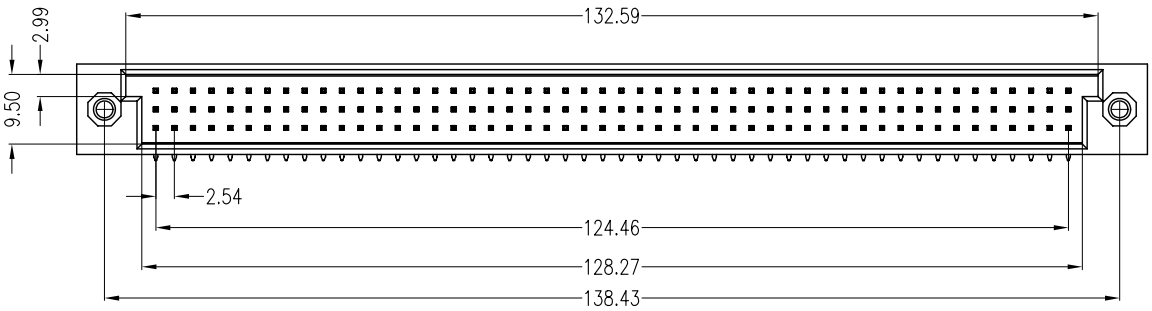



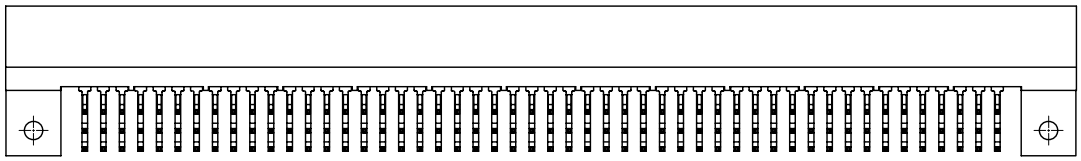

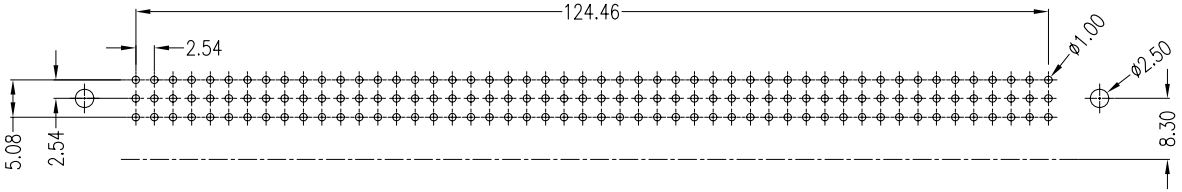

NOTES

*Material:

Body: PPS,Glass Filled UL 94V-0 Rated
Color: Black
Contact: phosphor bronze
Contact Plating: Gold Plating Over Nickel On Contact Area Tin Plating On solder tail

*Mechanical:

Retention Force : 800gf/per pin min
Insertion Force: 200gf max. Per Pin Pair
Unmating Force: 20 Grams Min. Per Pin Pair

*Electrical Specification:

Contact Resistance: 30 Milliohms Max. Initial
Insulation Resistance: 1000 Megohms Minimum. At 500 VDC
Withstand Voltage: 1000V AC

*Environmental:

Operating Temperture: -55°C To +105°C

*How To Order

WDNM - 150 C 2 P 1 P U

- Blank: NO Mark
- U: Lead Free
- P: Phosphor Bronze
- 1: Black
- P: PPS
- 2: Right Angle(3.00mm)
- A: Flash B:5u" C:10u" D:15u" F:30u"
- No. of Contacts
- Series NO.

REV							
Units	mm	Scale	1:1	Drawing By	Data		
Tolerance Unless Otherwise Specified				Reviewed By	Data	Date	
.X	~	±0.38				Sheet	1 of 1
.XX	~	±0.25				Third Angle Projection	
.XXX	~	±0.20		Approval By	Data		
Angle	~	± 3°					

Title	DIN 150P MALE.CRT		
Drawing No.	W050715	REV	A