

Part Number : W2S-340-A3A-3P2P2





Series NO. _____ 2: With Ears
NO. of Contacts _____ P: Phosphor Bronze
Gold A: Flash _____ 2: Brown
3: Triple Card Slot _____ P: PPS
A: Standard Type _____ 3: Metal Posts

◆ Material


Body High Temperature Thermoplastic.
Rated UL 94V-0.
Contacts Copper Alloy.
Retention Clip Copper Alloy.
Contact Plating Gold Plating Over Nickel On Contact
Area Tin/Lead Plating On Terminal.

◆ Mechanical

Contact Resistance 15 Milliohms Max. In Initial.
Insulation Resistance 1000 Megohms Min.
Withstanding Voltage 500 VAC. 1 Minute.
Current Rating 1 Ampere.
Insertion Force 100 Grams Max.
Withdrawal Force 15 Grams Min.
Retention Force 1 LB. Min.
Capacitance 2 pF Max.

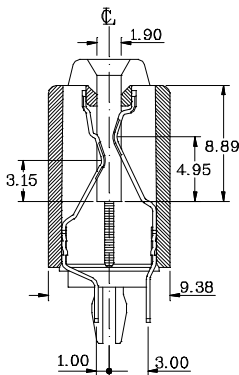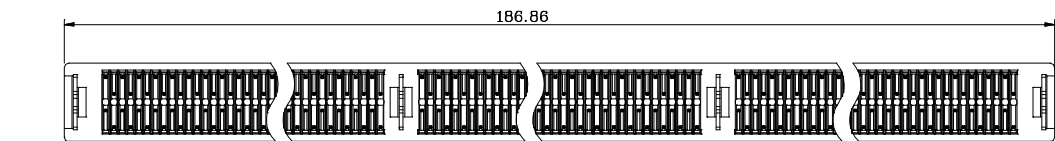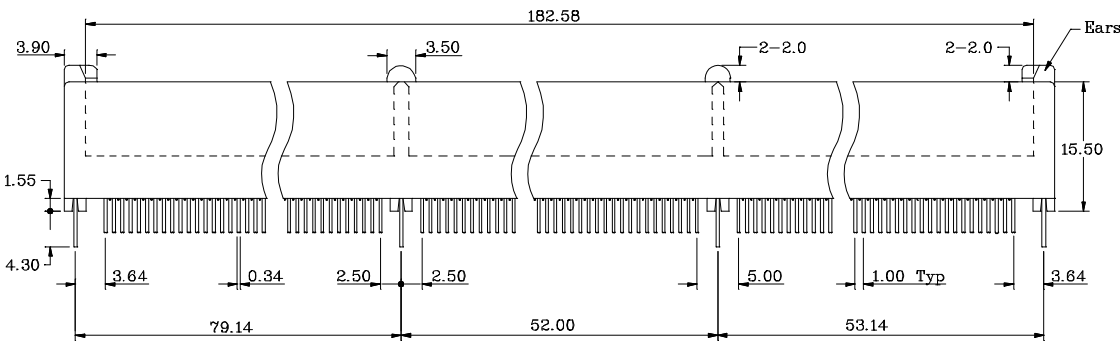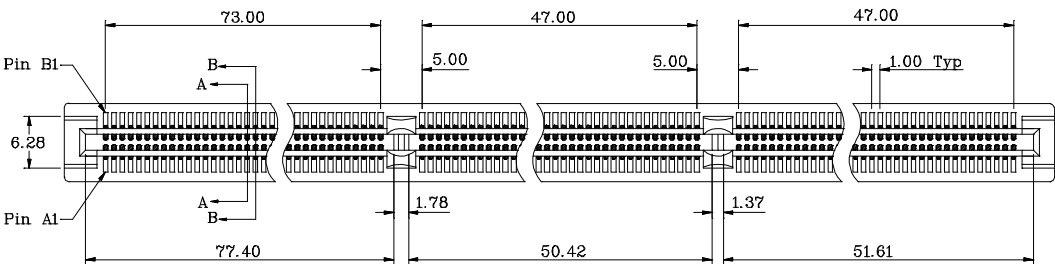

Section A-A

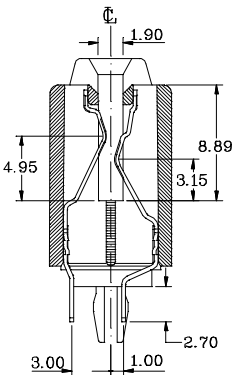

Section B-B

品 名 P/Name			未 註 入 公 差 Tolerance Unless Otherwise Specified	設 計 Designed	製 圖 Drawing	檢 圖 Reviewed	承 認 Approved	單 位	mm	比 例 尺		三 角 圖 法	
	NLX 340 Pins Connectors		.X ~ ±0.38					日 期 Date	09/02/98	Sheet	1 Of 2		
			.XX ~ ±0.25					圖 名 Name	NLX 340 Pins 承認圖		REV		
			.XXX ~ ±0.20					圖 號 Drawing No.	W2S-340MS-AN-W007		B		
			Angle ~ ± 3°										

