
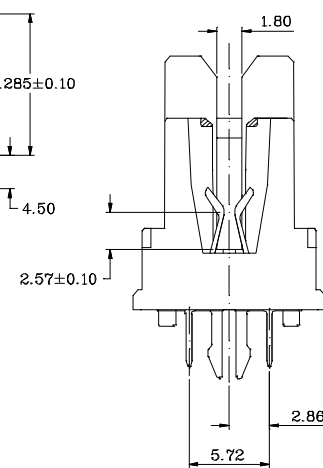
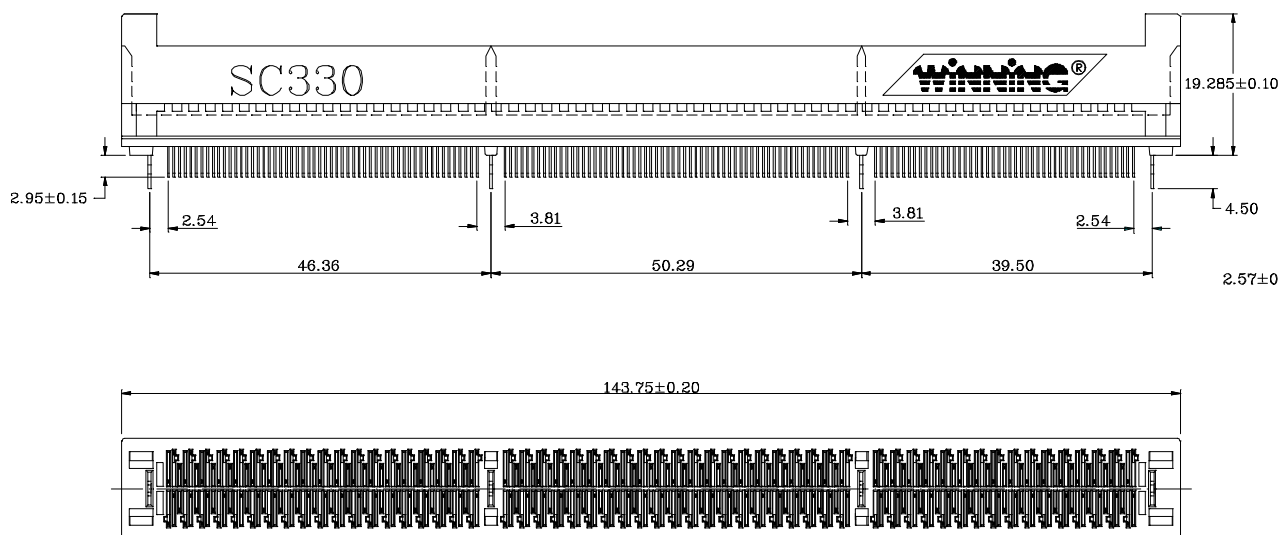


◆ Material


Body	High Temperature Thermoplastic. Liquid Crystal Polymer (LCP) Rated UL 94V-0.
Contacts	Copper Alloy.
Retention Clip	Copper Alloy.
Contact Plating	5u" Gold Plating Over 50u" Nickel On Contact Area 100u" Tin/Lead Plating On Terminal.

- ◆ Mechanical

Contact Resistance	10	Milliohms Max. In Initial.
Insulation Resistance	1000	Megohms Min.
Withstanding Voltage	400	Vac Min.
Current Rating	0.5	Ampere.
Insertion Force	35	LB Max.
Withdrawal Force	20	LB Max.
Contact Retention	300	Grams Min.
Capacitance	2	pF Max.

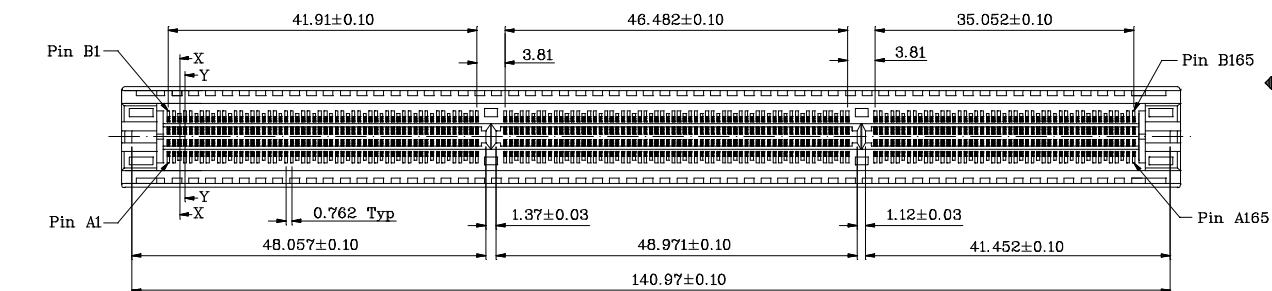

Section X-X

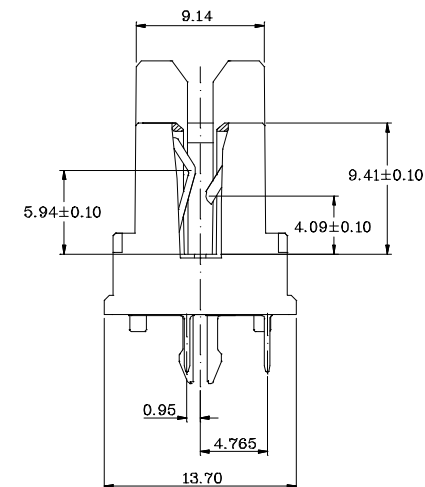

Section Y-Y

				未註入公差 Tolerance Unless Otherwise Specified	設計 Designed	製圖 Drawing	檢圖 Reviewed	承認 Approved	單位 mm	比例尺		三角圖法	
品名 P/Name	Slot 2 Loose Piece Pin Connectors			.X ~ ±0.38					日期 Date	09/07/99		Sheet	1 Of 2
				.XX ~ ±0.25					圖名 Name	SC330 Pin 承認圖 (技嘉)			REV
				.XXX ~ ±0.20					圖號 Drawing No.	W2TD-330MD-AN-W004			A
				Angle ~ ± 3'									