
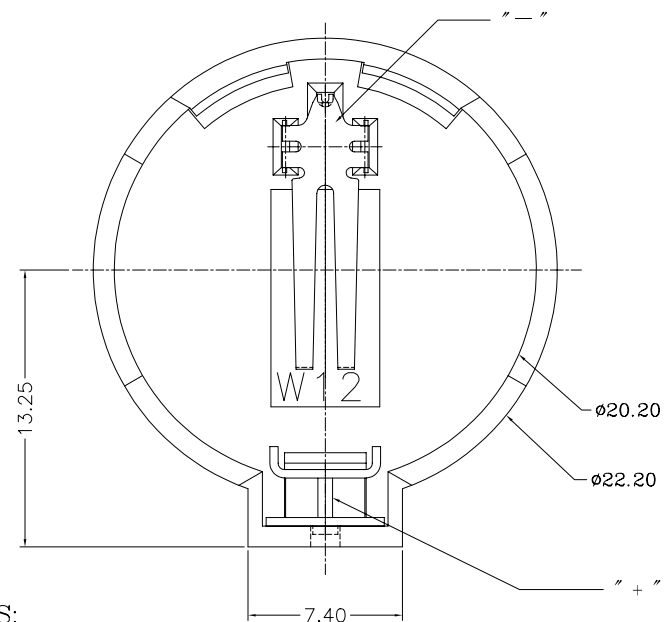
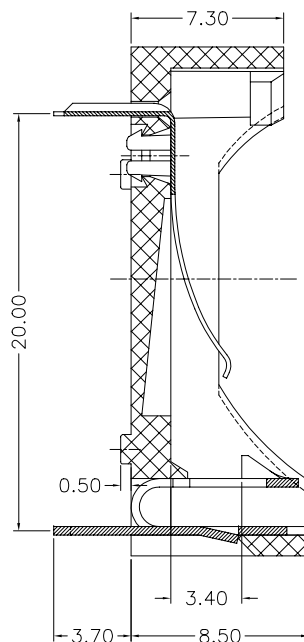


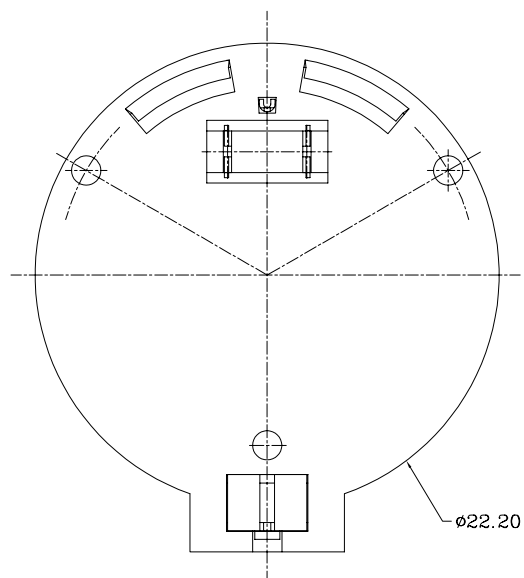

NOTES:

*Material

Body:FR-Nylon With 33 % Glass
Filld UL 94V-0 Rated.

Contact:Phpsphor Bronze

*Finish

Contact: Tin Plated Over Nickel or Copper.

*Specification

Application For 3V Lithium Battery

Insulator Tor Resistance:5000 Megaohms Min

Operation Temperature: -55°C To $+105^{\circ}\text{C}$

Durability:50 Cycles Min

Contact Resistance:30 Milliohms.

*How to order: WBA-2-A-2-

Series NO.


NO. Of Contacts

A:Standard

Blank:Sn Pb U:Lead Free

Blank:Black 2:Brown 3:White

– 2:Non-Post

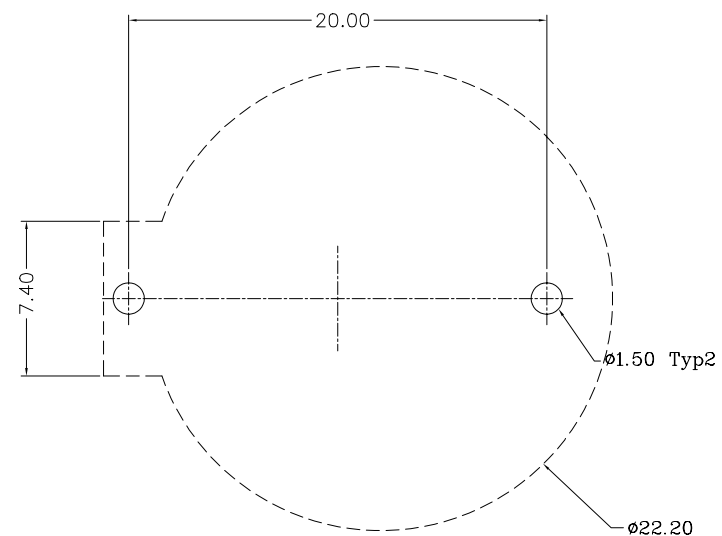

P.C. BOARD LAYOUT

REV																
Units	mm	Scale	1:1	Drawing By		Data										
Tolerance Unless Otherwise Specified																
.X ~ ±0.38			Reviewed By					Data		Date		Title	Battery Housing Standard Type			
.XX ~ ±0.25										Sheet	1 of 1					
.XXX ~ ±0.20										Approval By		Data		Third Angle Projection		Drawing No.
Angle ~ ± 3°					F/Name											