


CONSTRUCTION AND SIZE 構造與尺寸

UL STYLE NO. 2896, 20624, 20706

CONSTRUCTION 構造


Item (項目)		Detail (構成)
Conductor 導體	Material 材質	Tin Plated Copper 鍍錫軟銅箔
	Size 尺寸	C2 0.1 mm (thic kness) x 0.7mm (width) (厚 x 寬)
		C3 0.05mm (thic kness) x 0.7mm (width) (厚 x 寬)
		C8 0.1 mm (thic kness) x 0.5mm (width) (厚 x 寬)
Insulation 絕緣	Material 材質	(PVC)
	Color 顏色	White 白色
Supporting Tape 補強板	Material 材質	Polyester 聚酯
	Color 顏色	Blue 藍色

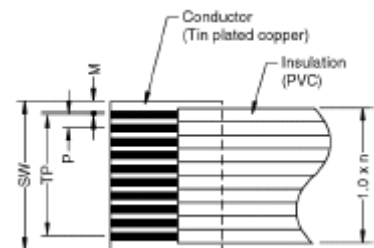

SIZE 尺寸

unit: mm

Item (項目)		Spec. (規格)
Number of Conductors 導體數	: n	C2 3~50 PIN
		C3 3~50 PIN
		C8 3~48 PIN
Pitch 間距	: P	1.0
Total Pitch 總間距	: TP	1.0 x (n-1)
Supporting Tape Width 補強板寬度	: S W	1.0 x (n+1)
Margin Width 邊寬	: M	C2 0.65
		C3 0.65
		C8 0.75
Thickness 線材厚度	: T	0.3
Strip Length 剝線長度	: S	3 · 4 · 5 · 6
Terminal Thic kness 終端厚度	: t	0.32 or 0.30
Supporting Tape Length 補強板長度	: d	5 · 6 · 8 · 10



· Ter minal Construction f or C/F, Z/C Connector